
THE FOLLOWING SHOULD BE ADHERED TO:

- 1. HANDLE, STORE AND DISPOSE OF MATERIALS PROPERLY.
- 2. AVOIDING EXCAVATION AND GRADING ACTIVITIES DURING WET WEATHER.
- 3. CONSTRUCT DIVERSION DIKES AND DRAINAGE SWALES AROUND WORKING SITES.
- 4. COVER STOCKPILES AND EXCAVATED SOIL WITH SECURED TARPS OR PLASTIC SHEETING.
- 5. DEVELOPE AND IMPLEMENT EROSION CONTROL PLANS AND PROVIDE A COPY
- 6. CHECK AND REPAIR LEAKING EQUIPMENT AWAY FROM CONSTRUCTION SITE.
- 7. DESIGNATE A LOCATION AWAY FROM STORM DRAINS FOR REFUELING.
- 8. COVER AND SEAL CATCH BASINS WHENEVER WORKING IN THEIR VICINITY.
- 9. USE VACUUM WITH ALL CONCRETE SAWING OPREATIONS.
- 10. NEVER WASH EXCESS MATERIAL FROM AGGREGATE, CONCRETE OR EQUIPMENT ONTO A STREET.
- 11. CATCH DRIPS FROM PAVER WITH DRIP PANS OR ABSORBENT MATERIAL.
- 12. CLEAN UP ALL SPILLS USING DRY METHODS.
- 13. SWEEP ALL GUTTERS AT THE END OF EACH WORKING DAY GUTTERS SHALL BE KEPT CLEAN AFTER LEAVING CONTRUCTION SITE.
- 14. DURING CONSTRUCTION, DUMPSTER(S) SHALL BE SET ON SITE AT ALL TIMES.
- 15. CALL 911 IN CASE OF A HAZARDOUS SPILL.
- 16. KEEP A RUNNING LOG OF ALL ACTIVITIES IN CONNECTION WITH THE STORM WATER POLLUTION PREVENTION PLAN (S.W.P.P.P.)
- 17. NAME A PERSON, ON SITE RESPONSIBLE FOR COMPLYING WITH S.W.P.P.P.
- 18. THE FOLLOWING BMP'S AS OUTLINED IN, BUT NOT LIMITED TO, THE "BEST MANAGEMENT PRACTICE HANDBOOK, CALIFORNIA STORMWATER QUALITY TASK FORCE, SACRAMENTO, CALIFORNIA, 1993", OR THE LATEST REVISED EDITION, MAY APPLY DURING THE CONSTRUCTION OF THIS PROJECT. (ADDITIONAL MEASURES MAY BE REQUIRED IF DEEMED APPROPRIATE BY COUNTY INSPECTORS):
  - -- DEWATERING OPERATIONS
- -PAVING OPERATIONS CA003 -STRUCTURE CONSTRUCTION AND PAINTING
- CA010 CA011 -MATERIAL DELIVERY AND STORAGE
- -MATERIAL USE
- CA012 -SPILL PREVENTION AND CONTROL CA020
- -- HAZAROOUS WASTE MANAGEMENT CA021
- -CONTAMINATED SOIL MANAGEMENT
- CA022 CA023 -CONCRETE WASTE MANAGEMENT
- CAG30 -VEHICLE AND FOURMENT CLEANING
- VEHICLE AND EQUIPMENT MAINTENANCE CA032
- -EMPLOYEE/SUBCONTRACTOR TRAINING
- ESC01 -SCHEDULING -PRESERVATION OF EXISTING VEGETATION
- ESC02 -SEEDING AND PLANTING
- ESC11 -MULCHING
- -GEOTEXTILES AND MATS
- ESC21 -DUST CONTROLS
- ESC23 -CONSTRUCTION ROAD STABILIZATION ESC24 -STABILIZED CONSTRUCTION ENTRANCE
- ESC30 -EARTH DIKE
- ESC31 ESC32 -TEMPORARY DRAINS AND SWALES -SLOPE DRAIN
- FSC40 -OUTLET PROTECTION
- ESC41 -CHECK DAMS
- ESC42 -SLOPE ROUGHENING/TERRACING
- -STRAW BALE BARRIERS ESC51
- ESC52 ESC53 -SAND BAG BARRIER -BRUSH OR ROCK FILTER
- ESC54 -STORM DRAIN INLET PROTECTION
- - -SEDIMENT BASIN

# CITY OF COLTON COUNTY OF SAN BERNARDINO, CALIFORNIA TRAFFIC SIGNAL INSTALLATION PROJECT

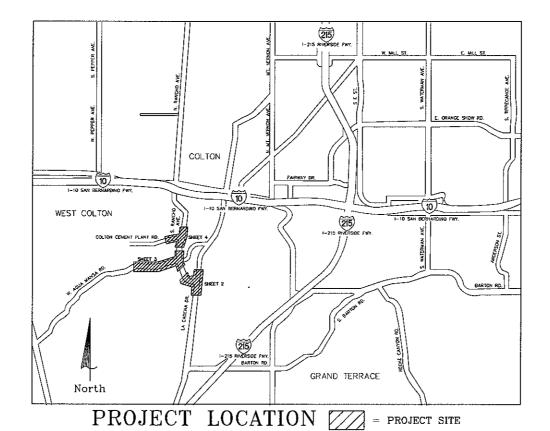

SITE PLAN

## **LEGEND**

- EXISTING STREET SIGN
- PROPOSED STREET SIGN
- EXISTING STREET SIGN TO BE REMOVED
- EXISTING PAYEMENT MARKING TO REMAIN
- ◆ PROPOSED PAVEMENT MARKING EXISTING PAVEMENT MARKING TO BE REMOVED
- --- EXISTING STRIPING TO REMAIN
- ----- PROPOSED STRIPING
- EXISTING STRIPING TO BE REMOVED

### INDEX OF DRAWINGS

TITLE SHEET	SHEET	1
SIGNAL PLAN - LA CADENA-DR/ RANCHO AVE	SHEET	2
SIGNAL PLAN - AGUA MANSA RD/ RANCHO AVE	SHEET	3
SIGNAL PLAN COLTON COVENT PLANT PD /RANGHO AVE	SHEET	4

#### SIGN LEGEND



R5-1

**SPEED** 

LIMIT

45

R2-1(45)

TRUCK

ROUTE

R14-1















DO NOT PASS

PARKING ANY TIME

USE 🖚 CROSSWALK

R9-3b

**+--**

R26(CA)





אס 🔰 אאטד

R73-3(CA)





R4-1



W1-7











### TRAFFIC SIGNAL GENERAL NOTES:

- ALL WORK EMBODIED ON THESE PLANS SHALL BE DONE IN CONFORMITY WITH APPLICABLE PROVISIONS OF THE CALTRANS STANDARD PLANS AND SPECIFICATIONS, 2006 EDITION, THE STANDARD DRAWINGS ON FILE IN THE OFFICE OF THE CITY ENGINEER, AND THE SPECIAL
- THE EXISTENCE AND LOCATIONS OF ANY UNDERCROUND UTILITIES, PIPES OR SUBSTRUCTURES
  SHOWN ON THESE PLANS HAVE BEEN OBTAINED BY A SEARCH OF AVAILABLE RECORDS. THE
  APPROVAL OF THESE PLANS BY THE CITY OF COLTON DOES NOT CONSTITUTE A
  REPRESENTATION AS TO THE ACCURACY OF THE LOCATIONS OR THE EXISTENCE OR
  NONEXISTENCE OF ANY UTILITIES.
- THE CONTRACTOR SHALL CONDUCT HIS OPERATIONS IN SUCH A MANNER AS TO PROTECT NOT ONLY UTILITIES AND SUBSTRUCTURES SHOWN BUT OTHER UTILITIES AND SUBSTRUCTURES THAT ARE NOT SHOWN ON THESE PLANS.
- THE CONTRACTOR SHALL NOTIFY ALL UTILITIES AT LEAST 48 HOURS IN ADVANCE OF ANY EXCAVATION. FOR ASSISTANCE CALL UNDERGROUND SERVICE ALERT, USA 1-800-227-2600.
- 5. DURING THE PERIOD OF CONSTRUCTION, THE CONTRACTOR SHALL FURNISH, ERECT AND MAINTAIN SUCH WARNINGS, SIGNS, BARRICADES, AND OTHER SAFETY MEASURES AS TO MAINTAIN SAFE PASSAGE FOR PEDESTRIANS AND VEHICLES AT ALL TIMES WITH REFERENCE TO THE MULT.C.D. AND AS DIRECTED BY THE CITY ENGINEER.
- THE CONTRACTOR SHALL REINSTALL PAVEMENT MARKINGS AND STRIPING THAT HAVE BEEN DISTURBED BY HIS OPERATIONS.
- THE CONTRACTOR SHALL POSSESS A CLASS "A" OR APPROPRIATE CLASS LICENSE AT THE TIME THE CONTRACT IS AWARDED.
- 8. THE CONTRACTOR SHALL NOT OPEN MORE TRENCH THAN CAN BE PROPERLY CONSTRUCTED AND FILLED IN A DAY'S OPERATION, ANY TRENCH UNAVOIDABLY LEFT OPEN DURING THE HOURS OF DARKNESS OR OVER A WEEKEND SHALL BE FENCED WITH A 6-FOOT CHAIN LINK FENCING AND BE PROPERLY LIGHTED.
- SHOULD ANY OF THE EXISTING UTILITIES OR ANY OTHER FACILITIES CONFLICT WITH THE PROPOSED CONSTRUCTION, THE CONTRACTOR SHALL NOTIFY THE ENGINEER AND AWAIT THE RELOCATION AND/OR ALTERNATIVE DESIGN.
- 10. ALL REMOVALS IN PAVED AREAS SHALL BE SAW CUT ON A NEAT, STRAIGHT LINE. THE CUT EDGE SHALL BE PROTECTED FROM CRUSHING AND ALL BROKEN EDGES SHALL BE RECUT PRIOR TO PANING OPERATIONS.
- ALL VEHICULAR AND PEDESTRIAN SIGNAL FACES SHALL BE L.E.D. WITH 12" LENSES. ALL PEDESTRIAN SIGNAL FACES SHALL HAVE COUNTDOWN TIMER.
- 12. INSTALL BATTERY BACK-UP SYSTEM PER THE SPECIAL PROVISIONS AS DIRECTED BY THE CITY FNOINFER

Underground Service Aleri


YOUR DIG ALERT LD. HUMBER CALL INDERGROUND SERVICE ALERT TOLL FREE 1-800-227-2500 TWO WORKING DAYS BEFORE YOU O




MUJIB AHMED, R.C.F. NO. 68467



Tel: (909) 890-9693 Fax: (909) 890-9694



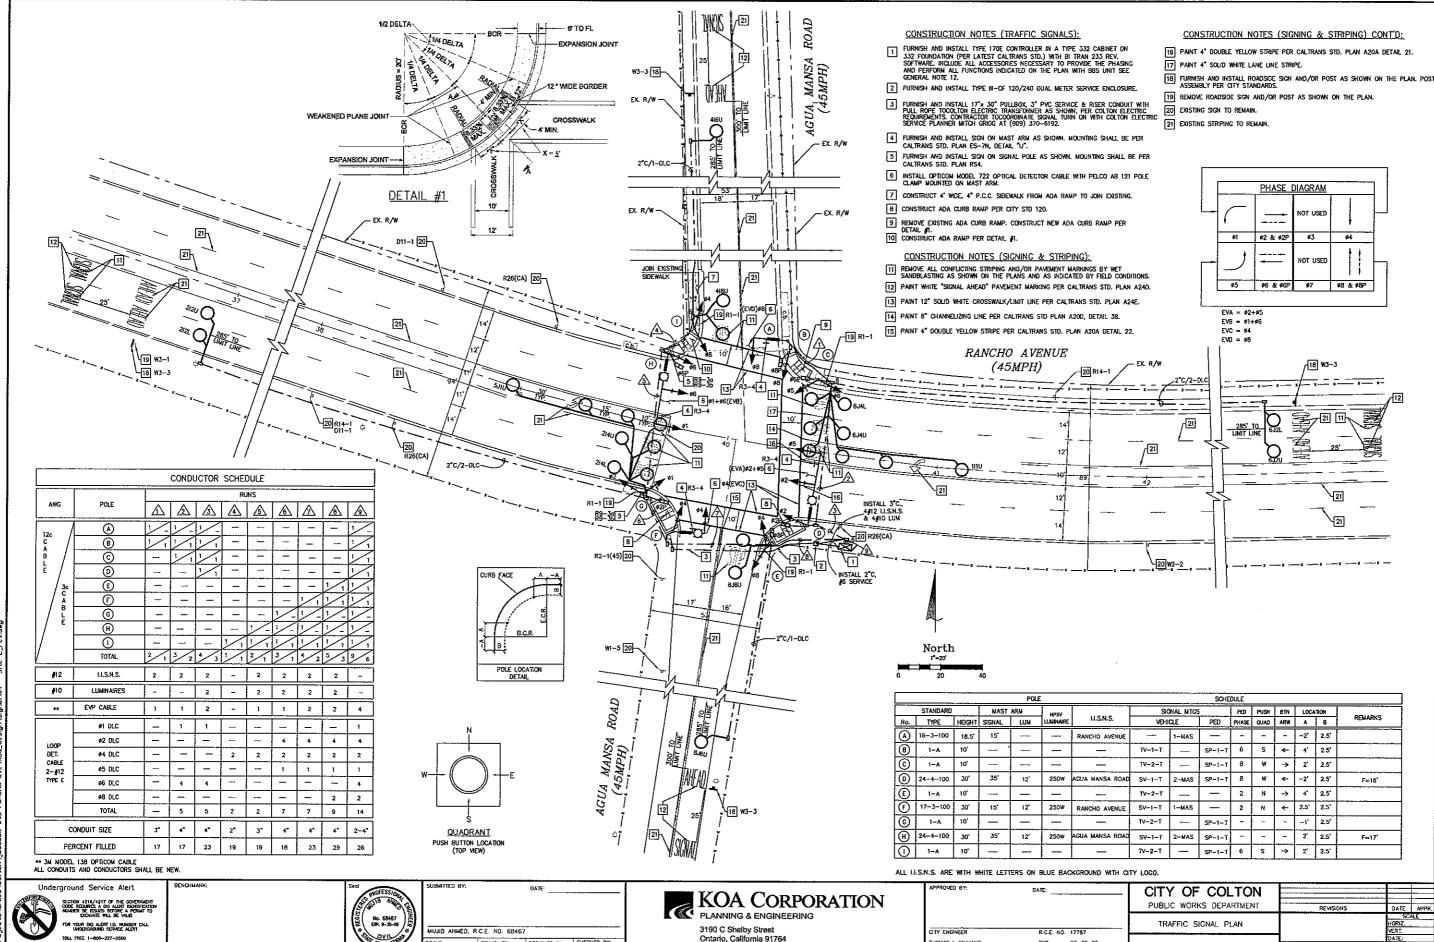

Tel: (909) 890-9693 Fax: (909) 890-9694

THOMAS I. WILLIAMS

EXP. 05-30-09

RANCHO AVE & AGUA MANSA RD

ON NA.P

DESIGNED BY: